



QUAD BRI

ATLAS 550 MODULE

PRODUCT FEATURES



- Four basic rate ISDN U interfaces
- LT mode and NT mode support
- ANSI T1.601 compliant
- Compliant with Lucent 5ESS, Nortel DMS100, and National ISDN
- Near-end and far-end block error monitoring
- Maximum distance of 18,000 feet
- Flash upgradable
- Occupies a single user slot in the ATLAS 550 chassis
- Hot swappable
- Standard 5-year warranty

ATLAS includes an advanced access architecture for switching dial-up calls to specific ports or DS0s. The Quad Basic Rate ISDN (BRI) Module contains four ISDN U interfaces and combines with other ATLAS 550 components to implement an ISDN access switch. The Quad BRI Module can connect to the ISDN network (NT mode), or it can emulate the ISDN network to other ISDN access devices (LT mode) that support the U Interface, such as terminal adapters and network termination units.

As a component in an ATLAS 550 access switching application, the Quad BRI Module can consolidate multiple Basic Rate ISDN (BRI) connections onto T1/PRI access lines. The module also supports BRI-to-BRI, BRI-to-PRI, and PRI-to-PRI switching. In addition, the ATLAS 550 can convert between ISDN D channel (PRI or BRI) and T1 robbed bit signaling, allowing non-ISDN equipment to access a more efficient PRI or BRI facility. Moreover, the module's call filtering feature allows you to program on a per-user basis, the call types that will be answered and originated.

The Quad BRI module can be configured through a variety of mechanisms, including Telnet or VT 100 emulation. SNMP management is supported for alarm and event reporting.

The Quad BRI Module includes an extensive array of diagnostic tools to assist in identifying and correcting network problems including a built-in Self-Test utility, local and remote loopback testing for B1, B2, and 2B+D, and performance monitoring to ensure the quality of the ISDN line.

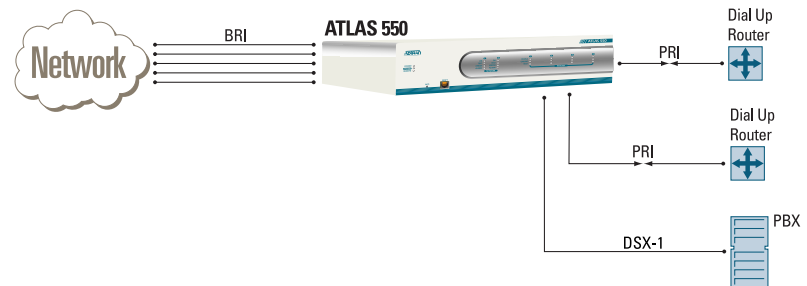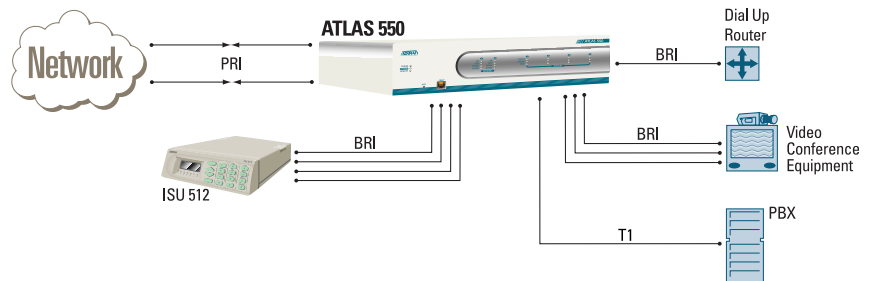

CORPORATE OFFICE

ADTRAN, Inc.
901 Explorer Boulevard
P.O. Box 140000
Huntsville, AL 35814-4000

800 9ADTRAN
256 963-8000
fax: 256 963-8699
fax back: 256 963-8200
e-mail: info@adtran.com
web site: www.adtran.com

REGIONAL OFFICES

Chicago, IL 800 436-4217
Seattle, WA 800 390-1573
Washington, DC 800 794-9798

FIELD OFFICES

Atlanta, GA 800 289-0966
Chicago, IL 800 471-8655
Columbus, OH 888 865-2237
Dallas, TX 800 471-8648
Denver, CO 800 471-8651
Irvine, CA 800 788-5408
Kansas City, KS 800 471-8649
Los Angeles, CA 888 223-7668
Nashville, TN 888 223-7657
New York, NY 800 471-8657
Portland, OR 888 223-7660
Richmond, VA 800 689-9915
San Jose, CA 888 223-7655

INTERNATIONAL CONTACTS

Asia Pacific/Australia
852 2824-8283 (Hong Kong)
Canada
800 232-6811
Caribbean/Latin America
954 746-5355
All other International inquiries
256 963-2500



I.S. EN ISO 9001

ADTRAN is an ISO 9001 registered company.



Printed in the U.S.A. on recycled paper.
61200315L1-8A May 2000
©2000 ADTRAN, Inc. All rights reserved.

Product Specifications

ISDN INTERFACE

- ANSI T1.601-1992 2B1Q U Interface

PHYSICAL INTERFACE

- 4-Pin Modular RJ-45

BRI LINE RATE

- 2B+D, 160 kbps full duplex

U-INTERFACE DISTANCE

- 18,000 feet with 1,300 Ohm resistance design

SWITCH COMPATIBILITY

- Lucent 5ESS, Nortel DMS-100, National ISDN

TERMINATION MODES

- LT (Network Emulation)
- NT (DCE)

DIAGNOSTICS

- Self-test
- B1, B2, & 2B+D Local and Remote Loopbacks

PERFORMANCE MONITORING

- Near-End Block Errors (NEBES), & Far-End Block Errors (FEBES)

AGENCY APPROVALS

- FCC Part 15, Class A, FCC Part 68, UL, Canadian UL (CUL), Industry Canada CS-03

ENVIRONMENT

- Operating Temperature: 0° to 45°C, (32° to 113°F)
- Storage Temperature: -20° to 70°C, (-4° to 158°F)
- Relative Humidity: Up to 95%, non-condensing

POWER

- 2.0 Watts

PRODUCT INCLUDES

- Four RJ-45 to RJ-11 cables (7 feet) and user manual

Ordering Information

EQUIPMENT	PART #
Quad BRI Module	1200315L1



Specifications subject to change without notice.