

IMUX 56/64

ATLAS 550 RESOURCE MODULE

PRODUCT FEATURES

- Resource module for ATLAS 550
- Plugs on to any ATLAS 550 user module or resource host module
- Designed for disaster recovery applications
- BONDS multiple 56/64 kbps channels
- Implements BONDing Mode 1
- Capable of 16-128 kbps BONDing sessions
- Number of BONDed channels is user configurable from 2 to 32
- Can be used to restore Frame Relay or dedicated FT1/T1 links
- Supports DTR dialing, event driven, and terminal command BONDing
- Standard 5-year warranty

The ATLAS 550 IMUX 56/64 Module combines multiple ISDN B-channels using the BONDing Mode 1 protocol to support high bandwidth ISDN applications such as dial backup of frame relay or dedicated circuits. The inverse multiplexing (IMUX) capacity of the module is 32 DSOs or ISDN B-channels (2.048 Mbps total), which can be allocated according to the user's needs. For example, one bonding session in an ATLAS 550 could be configured to bond eight B-channels as a dial backup link to a remote 512 kbps device such as the ISU 512. Similarly, the total bonding capacity of the module might be configured to implement two sessions at 512 kbps, one at 384 kbps, and five at 128 kbps. The table on reverse shows how many sessions can be supported at typical BONDing rates.

The ATLAS 550 IMUX 56/64 Module has no external network or user interfaces and is a plug-on board for all user modules and the resource host module. Network traffic is passed to it through other ATLAS modules such as the Quad BRI Module or the Dual T1/PRI module. Similarly, traffic is passed to the user through modules such as the Dual Nx56/64 module. This partitioning allows the IMUX 56/64 Module to serve as a resource for multiple user devices.

When combined with the ATLAS 550, the IMUX 56/64 module can offer high speed dial backup around the network in frame relay applications. This same capability can be applied to providing dial backup of failed dedicated circuits or other network connections. Other applications that may call for the IMUX 56/64 Module include image transfer and video conferencing.

The IMUX 56/64 Module is compatible with the ISDN Dial Backup options of ADTRAN's ATLAS 800 Series, Express 5000 series products, and the IQ family of frame monitoring CSU/DSUs. It is also compatible with ISDN Access products such as ADTRAN's ISU 128 and ISU 512, as well as the ISDN dial backup options of the TSU family of T1 access devices.

CORPORATE OFFICE

ADTRAN, Inc.
901 Explorer Boulevard
P.O. Box 140000
Huntsville, AL 35814-4000

800 9ADTRAN
256 963-8000
fax: 256 963-8699
fax back: 256 963-8200
e-mail: info@adtran.com
web site: www.adtran.com

REGIONAL OFFICES

Chicago, IL 800 436-4217
Seattle, WA 800 390-1573
Washington, DC 800 794-9798

FIELD OFFICES

Atlanta, GA 800 289-0966
Chicago, IL 800 471-8655
Columbus, OH 888 865-2237
Dallas, TX 800 471-8648
Denver, CO 800 471-8651
Irvine, CA 800 788-5408
Kansas City, KS 800 471-8649
Los Angeles, CA 888 223-7668
Nashville, TN 888 223-7657
New York, NY 800 471-8657
Portland, OR 888 223-7660
Richmond, VA 800 689-9915
San Jose, CA 888 223-7655

INTERNATIONAL CONTACTS


Asia Pacific/Australia
852-2824-8283 (Hong Kong)
Canada
800 232-6811
Caribbean/Latin America
954 746-5355
All other International inquiries
256 963-2500



I.S. EN ISO 9001
ADTRAN is an ISO 9001 registered company.



Printed in the U.S.A. on recycled paper.
61200326L1-8A August 2000
©2000 ADTRAN, Inc. All rights reserved.

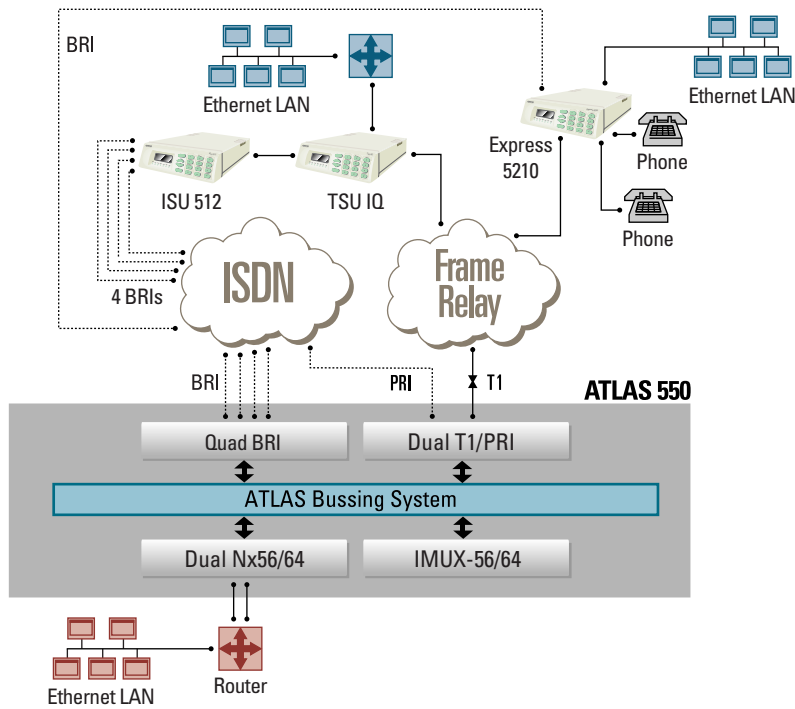

Capacity

As an example, a single IMUX 56/64 Module is capable of:

SESSION TYPE	MAXIMUM
128k	16
384k	5
512k	4
1536k	1
2048k	1

In addition to the specific configurations described in the above table, it is possible to configure ATLAS for a combination of IMUX speeds, e.g., three 512 kbps sessions and four 128 kbps sessions. Multiple IMUX 56/64 Modules can be installed in an ATLAS system to increase capacity.

Product Specifications

PROTOCOLS

- BONDing mode 1

CAPACITY

- Up to 16 128 kbps sessions
- Total bandwidth of 2.048 Mbps available

AGENCY APPROVALS

- FCC Part 15, Class A, UL, Canadian UL (CUL)

PHYSICAL DIMENSIONS

- Weight: 1.0 lb

ENVIRONMENTAL

- Operating Temperature: 0° to 45°C, 32° to 113°F
- Storage Temperature: -20° to 70°C, -4° to 158°F
- Relative Humidity: Up to 95%, non-condensing

PRODUCT INCLUDES

- User manual

Ordering Information

EQUIPMENT	PART #
IMUX 56/64 Module	1200326L1

Specifications subject to change without notice.