



T1 ESF CSU

STAND ALONE AND SMART 16 T1 NETWORK FACILITY INTERFACE

PRODUCT FEATURES

- Provides T1 facility interface and jitter tolerance per ANSI T1.403, T1.102 and AT&T TR 62411
- Supports B8ZS or AMI formats
- Conversion for signal formats and line coding
- Transmits unframed "All 1's" during signal loss from DTE or T1 Network
- Front Panel LCD and 4 button keypad (ACE)
- Automatic or manual line build-out configuration
- Standalone ACE package or Smart 16 single slot card
- Supports Performance Report Messages of ANSI T1.403 and AT&T 54016 maintenance messages
- 5 year warranty


The ADTRAN T1 ESF CSU is a full-featured T1 Channel Service Unit used to connect T1 data terminal equipment (DTE) such as a PBX, switch or channel bank to T1 facilities. Capable of interfacing to both B8ZS or AMI circuits, the T1 ESF CSU can convert signal formats or line code to integrate older equipment. The ESF CSU is designed to provide alarms, loopbacks, signal regeneration, line build-out, and surge protection, while maintaining 1's density for the DTE and T1 network.

The T1 ESF CSU ACE is suitable for wall-mounting or desktop use, while the T1 ESF CSU Smart 16 Card occupies a single slot in the ADTRAN Smart 16 shelf. A front panel LCD and four user keys on the front of the ACE provide easy configuration and unit monitoring from the front panel. The Smart 16 ESF CSU card can be controlled from the shelf controller through a VT 100 interface or the optional Datamate. For SNMP management, the Smart 16 ESF CSU card is supported by the Smart 16e controller and the ADVISION software package.

The T1 ESF CSU provides a T1 network interface and a DSX-1 DTE connection through modular RJ48C jacks. For testing purposes, the T1 ESF CSU is capable of initiating several built-in local and remote loopback tests and conducting stress testing of the network with built-in test patterns. For more extensive network testing, the unit uses bantam jack access for external test equipment. To aid with circuit monitoring, the T1 ESF CSU gathers ANSI PRMS information in 15 minute intervals for 24 hours, which is fully accessible from the front panel, over the FDL, or via a dial-up modem connection.

Remote configuration is made simple by using the FDL channel of a T1 ESF formatted circuit with the front panel or the Smart 16 controller interface. Using the remote configuration capability of the T1 ESF CSU enables central site control and setup for ADTRAN T1 CSUs or TSU devices. Compatibility with the popular T-Watch PRO software package enables the T1 ESF CSU to integrate easily into ADTRAN TSU environments.

For additional T1 applications, ADTRAN provides several T1 DSU/CSUs and T1 Multiplexers for combining traditional DSX-1 functionality with additional DTE ports. The TSU 100e, TSU 120e and TSU 600e are modular T1 DSU/CSUs with embedded SNMP and are capable of supporting a single DSX-1 interface and up to 22 DTE interfaces for data or video applications.

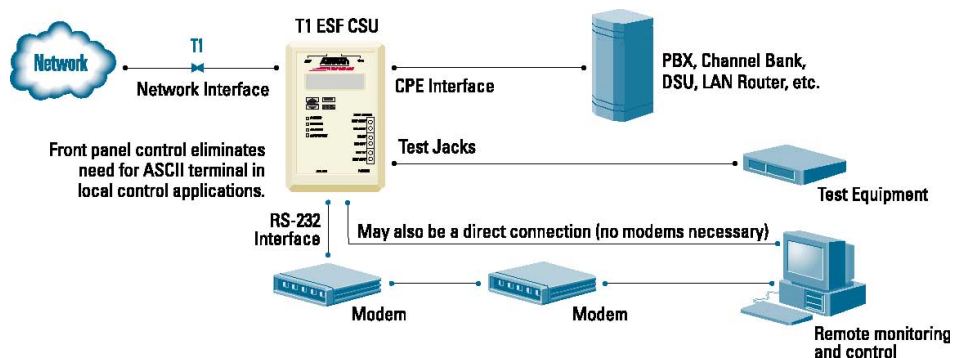

CORPORATE OFFICE

ADTRAN, Inc.
901 Explorer Boulevard
P.O. Box 140000
Huntsville, AL 35814-4000

800 9ADTRAN
256 963-8000
fax: 256 963-8699
fax back: 256 963-8200
e-mail: info@adtran.com
web site: www.adtran.com

REGIONAL OFFICES

Chicago, IL 800 436-4217
Seattle, WA 800 390-1573
Washington, DC 800 794-9798

FIELD OFFICES

Atlanta, GA 800 289-0966
Chicago, IL 800 471-8655
Columbus, OH 888 865-2237
Dallas, TX 800 471-8648
Denver, CO 800 471-8651
Irvine, CA 800 788-5408
Kansas City, KS 800 471-8649
Los Angeles, CA 888 223-7668
Nashville, TN 888 223-7657
New York, NY 800 471-8657
Portland, OR 888 223-7660
Richmond, VA 800 689-9915
San Jose, CA 888 223-7655

INTERNATIONAL CONTACTS

Asia Pacific/Australia
852-2824-8283 (Hong Kong)
Canada
800 232-6811
Caribbean/Latin America
954 746-5355
All other International inquiries
256 963-2500



I.S. EN ISO 9001

ADTRAN is an ISO 9001 registered company.



Printed in the U.S.A. on recycled paper.
61203025L1-8B September 1998
©1998 ADTRAN, Inc. All rights reserved.

Product Specifications

NETWORK INTERFACE

Line Rate

- T1-FT1 (1.544 Mbps)

Physical Interface

- RJ48C : 8-Pin Modular

Specifications

- ANSI T1.403, AT&T TR62411

Framing

- SF/ESF

Line Code

- AMI/B8ZS

ESF Format

- ANSI T1.403, AT&T 54016

Input Signal

- 0 to -36dB

Transmission Type

- Regenerative transparent: Network & DTE

USER TESTING

Local

- Payload/Line (NI), DTE (T1)

Remote

- Payload/Line (NI)

Test Patterns

- 1:8, All 0's, All 1's

PERFORMANCE MONITORING

Performance Data

- BPVs/CRCs, ES, SES, UAS, %AS, %EF SEC
- Alarms, Error Rates

Reports

- NI information stored 24 hrs, every 15 min.

PRMS

- ANSI Performance Report
- Messages (User Selectable)

EQUIPMENT INTERFACE

Compliance

- ANSI T1.403, AT&T 62411

Receiver Performance

- Automatic Line Build-out for 0-655 ft.

Keep Alive Signal

- Unframed/framed "All 1's" loss of DTE signal

USER OPTIONS

Mounting

- Desktop or Wall Mount (ACE)
- Single Slot in ADTRAN Smart 16 Chassis

Bantam Jacks

- Test Signal access to Network & DTE
- Non-interrupt signal receive: Network & DTE

LED Indicators (ACE)

- Power
- Errors
- Alarms
- Loopback

LED Indicators (SM 16)

- Status
- Net. & Eq. AIS
- Net. & Eq. Yellow Alarm
- Net. & Eq. Code Violation
- Net. & Eq. LOS
- Net. & Eq. OOF
- Test

COMPLIANCE

- FCC part 15, Class A, Part 68, Industry
Canada CS03, UL 1459, CUL

ENVIRONMENT

Operating

- 0° to 50°C (32° to 122°F)

Storage

- -20° to 70°C (-4° to 158°F)

Relative Humidity

- Up to 95%, non-condensing

Dimensions

- ACE: 1.675"H x 7.22"D x 4.05"W
- Smart 16 Card: Standard ADTRAN SM 16

Weight

- 1 lb.

Power

- ACE: -42 to -56 VDC, 2.5W
- Smart 16 Card: From Smart 16 Chassis

Ordering Information

EQUIPMENT

PART

T1 ESF CSU ACE.....1203025L1
T1 ESF CSU Smart Card.....1202066L1

Product includes: Manual and RJ45 Cable

Specifications subject to change without notice.