

# QUAD USSI

## ATLAS MODULE

### PRODUCT FEATURES

- Four EIA-530, EIA-530A, RS-449, RS-232, X.21(V.11), V.36 DTE ports
- Synchronous operation to 2.048 Mbps
- Extensive self-test support
- 50% Duty Cycle Output Clock at all rates
- V.54 loopback
- Generates and detects 511 Test Pattern
- In-band communications channel for remote management
- User-mapping of DS0s to DTE port logical channels
- DTR dialing support
- Flash Upgradable
- Occupies a single slot in the ATLAS chassis
- Hot swappable
- Standard 5-year warranty

The Quad Universal Synchronous Serial Interface (USSI) module combines with other ATLAS components to provide solutions for a variety of wide area networking applications. Providing four synchronous EIA-530, EIA-530A, X.21, (V.11), V.36, RS-449 or RS-232 DTE ports, the Quad USSI module serves as the interface for high-speed routers and other DTE equipment to access the wide area network.


Each port of the Quad USSI module can be configured through software to operate at any multiple of 56 or 64 kbps, up to 2.048 Mbps.

Using the ATLAS Channel Mapping Utility, a port can be mapped to one or more DS0s of a T1 or T3 circuit, providing high performance connections to remote locations. For switched access applications, ATLAS can be configured to route calls between the Quad USSI module and ISDN (Basic Rate or Primary Rate) circuits.

As with all ATLAS components, configuration can be accomplished through a variety of mechanisms, including Telnet or VT 100 emulation. SNMP management is supported for alarm and event reporting.

The Quad USSI module supports an 8,000 bps in-band management channel to communicate with remote ADTRAN® TSU™ devices. This channel is available full-time for sending management information between devices.

The Quad USSI module includes an extensive array of diagnostic tools, to assist in identifying and correcting network problems. Included is a built-in Self-Test utility, as well as standards-based 511 test pattern generators and detectors for each of the four ports. Key interface signals from each of the four ports are monitored and displayed, providing real time status of network activity.

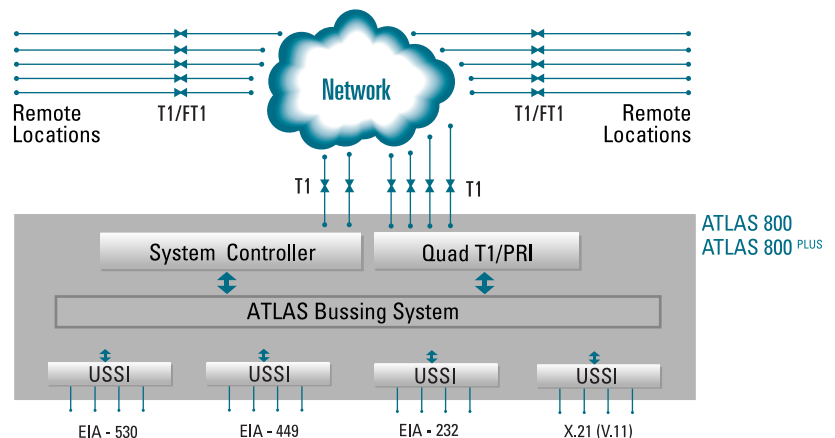

## CORPORATE OFFICE

ADTRAN, Inc.  
901 Explorer Boulevard  
P.O. Box 140000  
Huntsville, AL 35814-4000

800 9ADTRAN  
256 963-8000  
fax: 256 963-8699  
fax back: 256 963-8200  
e-mail: info@adtran.com  
web site: www.adtran.com

## REGIONAL OFFICES

Chicago, IL 800 436-4217  
Seattle, WA 800 390-1573  
Washington, DC 800 794-9798

## FIELD OFFICES

Atlanta, GA 800 289-0966  
Chicago, IL 800 471-8655  
Columbus, OH 888 865-2237  
Dallas, TX 800 471-8648  
Denver, CO 800 471-8651  
Irvine, CA 800 788-5408  
Kansas City, KS 800 471-8649  
Los Angeles, CA 888 223-7668  
Nashville, TN 888 223-7657  
New York, NY 800 471-8657  
Portland, OR 888 223-7660  
Richmond, VA 800 689-9915  
San Jose, CA 888 223-7655

## INTERNATIONAL CONTACTS

Asia Pacific/Australia  
852-2824-8283 (Hong Kong)  
Canada  
800 232-6811  
Caribbean/Latin America  
954 746-5355  
All other International inquiries  
256 963-2500



I.S. EN ISO 9001

ADTRAN is an ISO 9001 registered company.



Printed in the U.S.A. on recycled paper.  
64200261L1-8A September 1999  
©1999 ADTRAN, Inc. All rights reserved.

# Product Specifications

## PHYSICAL INTERFACE

- EIA-530, EIA-449, X.21, V.11, V.36, or EIA-232

## OPERATING MODE

- Synchronous, V.35

## DATA RATES

- Any multiple of 56 or 64 kbps up to 2.048 Mbps

## CLOCK OPTIONS

- Internal, External, Internal Invert

## ALARMS

- Clock slip
- No external clock
- PLL failed to lock
- Excessive zeros

## DIAGNOSTICS

- Self test
- 511 test pattern generator and detector

## SIGNAL MONITORING

- RTS, CTS, DTR, DSR, DCD, RI, TD, RD

## AGENCY APPROVALS

- FCC part 15, Class A, UL, and Canadian UL (CUL)

## ENVIRONMENT

- **Operating Temperature:** 0° to 45°C, (32° to 113°F)
- **Storage Temperature:** -20° to 70°C (-4° to 158°F)
- **Relative Humidity:** Up to 95%, non-condensing

## POWER

- 8 watts

## PRODUCT INCLUDES

- Two DB-37 to V.35 adapter cables, each servicing two DTE ports and user manual

# Ordering Information

## EQUIPMENT

## PART #

USSI - 449/V.36.....	4200261L1
USSI - EIA-530A.....	4200261L2
USSI - X.21/V.11.....	4200261L3
USSI - EIA-232.....	4200261L4

Specifications subject to change without notice.

