


# IAC-C102A

19" 1U 2-Slot Chassis with 200W Power Supply

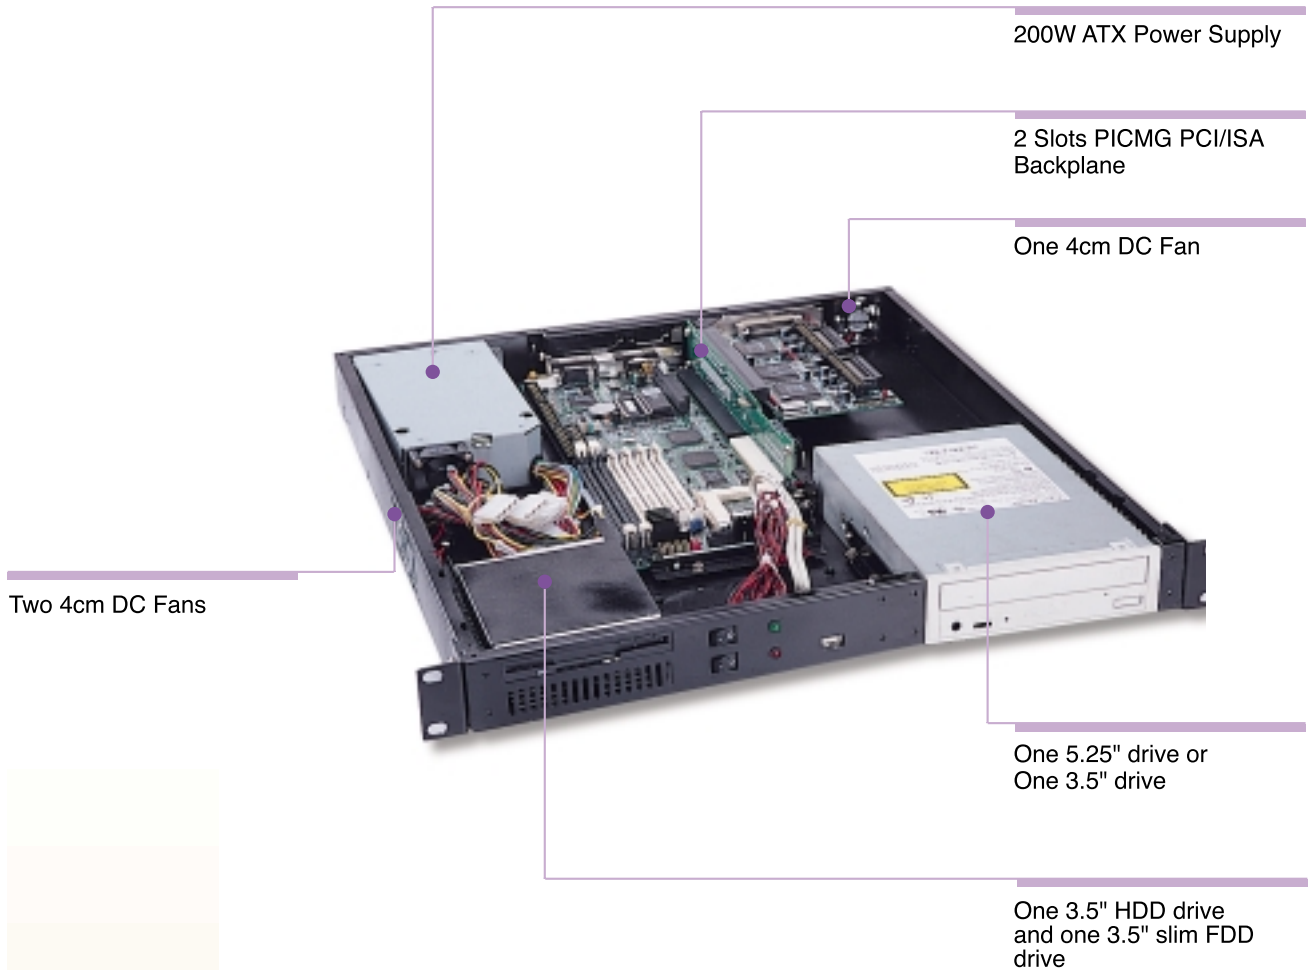


## FEATURES

- 19" Compact size rack mounted chassis, heavy duty steel for harsh industrial environments
- Supports IAC-BM03A backplane (PICMG x 1, PCI x 1 or ISA x 1)
- Included 200W power supply
- Supports one 3.5" HDD drive and one 3.5" slim FDD drive, one 5.25" CD-ROM drive or one 3.5" HDD drive
- One USB connector at front panel

# 19" 1U 2-Slot Chassis with 200W Power Supply

## SPECIFICATION

- **Construction:**  
Heavy duty steel, 19" Rackmount chassis
- **Disk Drive Bays:** Supports two 3.5" slim drives, one 5.25" drive or one 3.5" drive
- **Cooling Fan:** Three 4cm DC Fans (7.0 CFM ea.)
- **Connector:** One USB connector at front panel
- **Controls:** Power ON/OFF, RESET switches
- **Status Indicators:** Power ON/OFF, HDD status
- **Dimension (HxWxD):**  
44.4x483x500mm (1.75"x16.97"x19.69")
- **Weight:** 6kgs (include power supply)

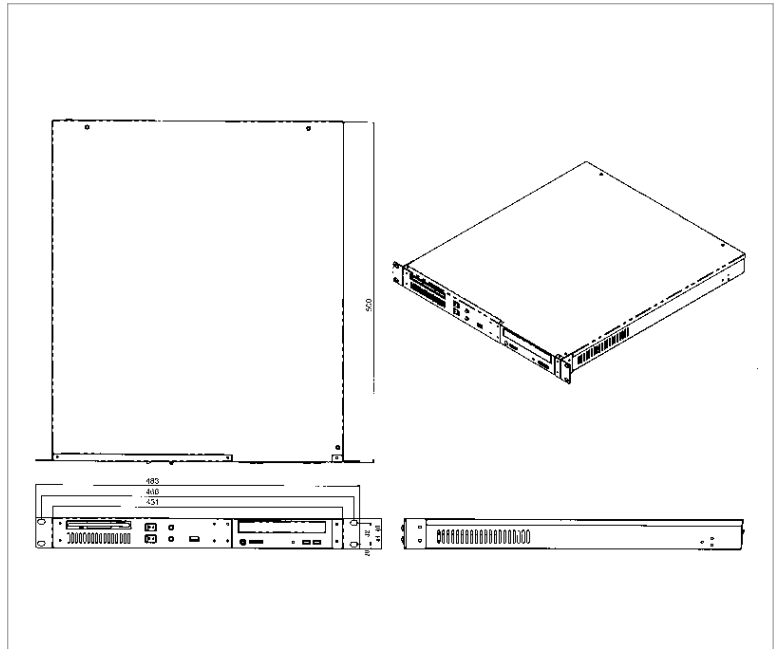

Top View



Back View

### Passive Backplanes

- Included IAC-BM03A, 2 slot PICMG PCI/ISA backplane (PICMG x 1, PCI x 1 or ISA x 1)

### Power Supply

- Included JET-216AP 200W ATX switching power supply with PFC

### Environmental Specification

- **Operating Temperature:** 0°C to 50°C
- **Relative Humidity:** 5% to 95%, non-condensing
- **Altitude:** 10,000ft (3,000m)
- **Vibration:** 1.5G Max and 0.1" p-p at 5 to 500Hz
- **Shock:** 10G peak acceleration (10m/sec)
- **Safety:** Meets UL, CSA, and TUV
- **EMI:** FCC Class A and CE

## ORDERING INFORMATION

Model	W/ Backplane	W/ Power Supply
IAC-C102A	IAC-BM03A (PICMG x 1, PCI x 1 or ISA x 1)	JET-216AP